



J.L. WINGERT CO.

P.O. Box 6207 • Garden Grove, CA 92846-6207 / 11800 Monarch Street • Garden Grove, CA 92841-2113
 Phone (714) 379-5519 • Fax (714) 379-5549 ■ Email: customerservice@jllwingert.com
 Northern California Region • Phone (510) 487-5310 ■ Southwest Region • Phone (602) 470-1015
 www.jllwingert.com

MANUFACTURING: Mixers, Bypass Feeders, Filter Feeders, Bromine Feeders, Sample Coolers, Sludge Traps, Separators, Separator Systems, Tank Stands, Tank Package Systems, Glycol Feed Systems, Coupon Racks, Control Stations, NEMA Enclosures, Custom Packaged Systems and Specialty Welding

Specification Sheet #052007 Rev. "A" (3/99)

"RFL" SERIES SEPARATORS (1/2" TO 2 1/2")

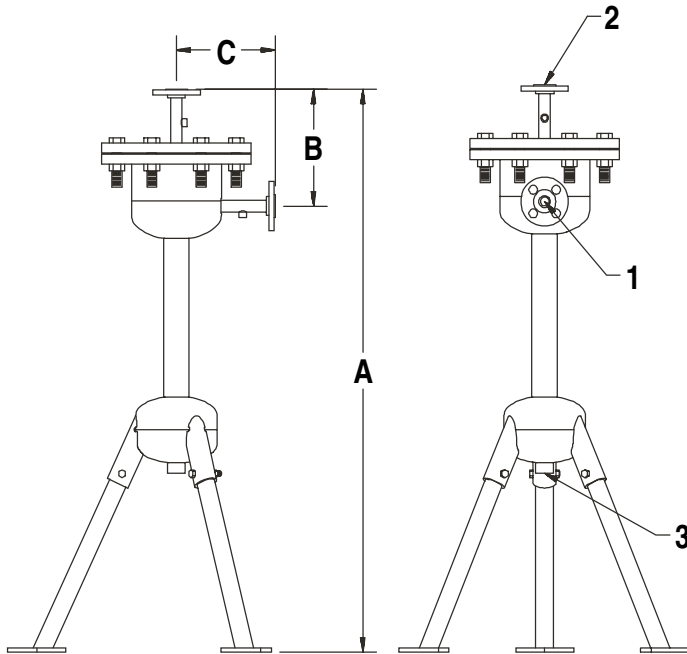

SPECIFICATIONS:

Body is constructed of carbon steel, ANSI 150#
 RF/SO inlet and outlet flanges and painted with water based enamel. All hardware is plated steel.

FLOW RANGE:

MODEL	4 PSI DROP	12 PSI DROP
RFL-0050	8 GPM	14 GPM
RFL-0075	14 GPM	25 GPM
RFL-0100	28 GPM	49 GPM
RFL-0125	49 GPM	84 GPM
RFL-0150	67 GPM	115 GPM
RFL-0200	90 GPM	157 GPM
RFL-0250	129 GPM	224 GPM

ACCESSORIES:

PART #	DESCRIPTION	SPEC. #
GK-1/8	Inlet and outlet pressure gauge kits	052207
PK-0075	3/4" manual purge kit	052205
PK-0150	1 1/2" manual purge kit	052205

MODEL SHOWN: RFL-0050

DIMENSIONS, CUBE, WEIGHT, PRESSURE & TEMPERATURE

KEY	RFL-0050	RFL-0075	RFL-0100	RFL-0125	RFL-0150	RFL-0200	RFL-0250
1	1/2" FLANGE	3/4" FLANGE	1" FLANGE	1 1/4" FLANGE	1 1/2" FLANGE	2" FLANGE	2 1/2" FLANGE
2	1/2" FLANGE	3/4" FLANGE	1" FLANGE	1 1/4" FLANGE	1 1/2" FLANGE	2" FLANGE	2 1/2" FLANGE
3	3/4" FNPT	3/4" FNPT	3/4" FNPT	3/4" FNPT	3/4" FNPT	1 1/2" FNPT	1 1/2" FNPT
A	40 3/8"	40 3/8"	40 5/16"	47 1/2"	47 1/2"	53 1/8"	53 1/8"
B	8 5/16"	8 1/4"	8 13/16"	9 7/8"	9 7/8"	10 7/8"	10 7/8"
C	7 1/4"	7 1/4"	7 1/4"	7 3/8"	7 3/8"	9 1/4"	9 1/4"
D	23"	23"	23"	23 1/4"	23 1/4"	23"	23"
CUBE	25" X 25" X 41"	25" X 25" X 41"	25" X 25" X 41"	25" X 25" X 48"	25" X 25" X 48"	25" X 25" X 54"	25" X 25" X 54"
WEIGHT	72 lbs.	76 lbs.	79 lbs.	84 lbs.	85 lbs.	168 lbs.	177 lbs.
PRESSURE	150 PSI maximum (10.3 bar)						
TEMPERATURE	200° F (93° C)						

Note: All dimensions are +/- 1/8". All weights are approximate. All dimensions are subject to change without notice.