
J.L.WINGERT CO.


Specification Sheet

DOME BOTTOM PLEATED FILTER FEEDERS MODEL PF-DB-[]HD


SS030012.C 05/16




LID (BOTTOM VIEW)



FEEDER (BOTTOM VIEW)



FEEDER (TOP VIEW - LESS LID)

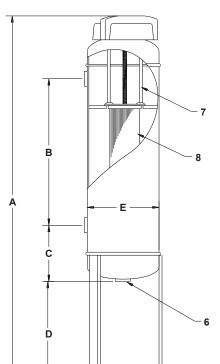

SPECIFICATIONS

KEY	PART	DESCRIPTION		
1	3071	CLOSURE: 3 1/2" cast iron, 1/4 turn closure, (O-ring included)		
2	3072	0-RING: Buna-N 0-ring 200°F		
3		BODY: Carbon steel		
4		OUTLET: 3/4" FNPT		
5		INLET: 3/4" FNPT		
6		DRAIN: 3/4" FNPT		
7	3186	PLEATED FILTER HANGER: 304 stainless steel hanger		
8	3187	FILTER: 20 micron high temp. pleated filter (10" long)		
MAX. PRESSURE		200 PSI (13.7 BAR)		
MAX. TEMPERATURE		200°F (93°C)		

VOLUME (FILL CAPACITY)

MODEL	GALLONS	LITERS
PF-DB-2HD	2.39	9.04
PF-DB-5HD	6.30	23.85
PF-DB-12HD	13.28	50.27

DIMENSIONS

DIMENSIONS					
KEY	PF-DB-2HD	PF-DB-5HD	PF-DB-12HD		
Α	30 3/4"	30 1/2"	51 1/4"		
В	12 1/2"	10 5/8"	31"		
С	4 3/8"	5 7/8"	5 7/8"		
D	8 3/4"	7 3/4"	7 3/4"		
E	6"	10"	10"		
F	4"	8"	8"		
G	3/8"	3/8"	3/8"		
WEIGHT	24 lbs. approx.	42 lbs. approx.	68 lbs. approx.		
SHIPPING DIMENSIONS	6" x 6" x 32"	10" x 10" x 32"	10" x 10" x 53"		

Note: All dimensions are +/- 1/8". All weights are approximate. All dimensions are subject to change without notice.