


J.L. WINGERT CO.

P.O. Box 6207 • Garden Grove, CA 92846-6207 / 11800 Monarch Street • Garden Grove, CA 92841-2113
 Phone (714) 379-5519 • Fax (714) 379-5549 ■ Southwest Regional Sales Office Phone (602) 470-1015
 30998 Huntwood Avenue, Unit 105 • Hayward, CA 94544-7033 • Phone (510) 487-5310 • Fax (510) 487-5137
 On the Internet: www.jlwingert.com • Email: customerservice@jlwingert.com

MANUFACTURING: Mixers, Bypass Feeders, Filter Feeders, Sample Coolers, Sludge Traps, Separators, Tank Stands,
 Tank Package Systems, Glycol Feed Systems, Coupon Racks, Custom Packaged Systems and Specialty Welding

Specification Sheet #012004 Rev. "C" (6/99)

MODEL T-M-TE-[H/A]

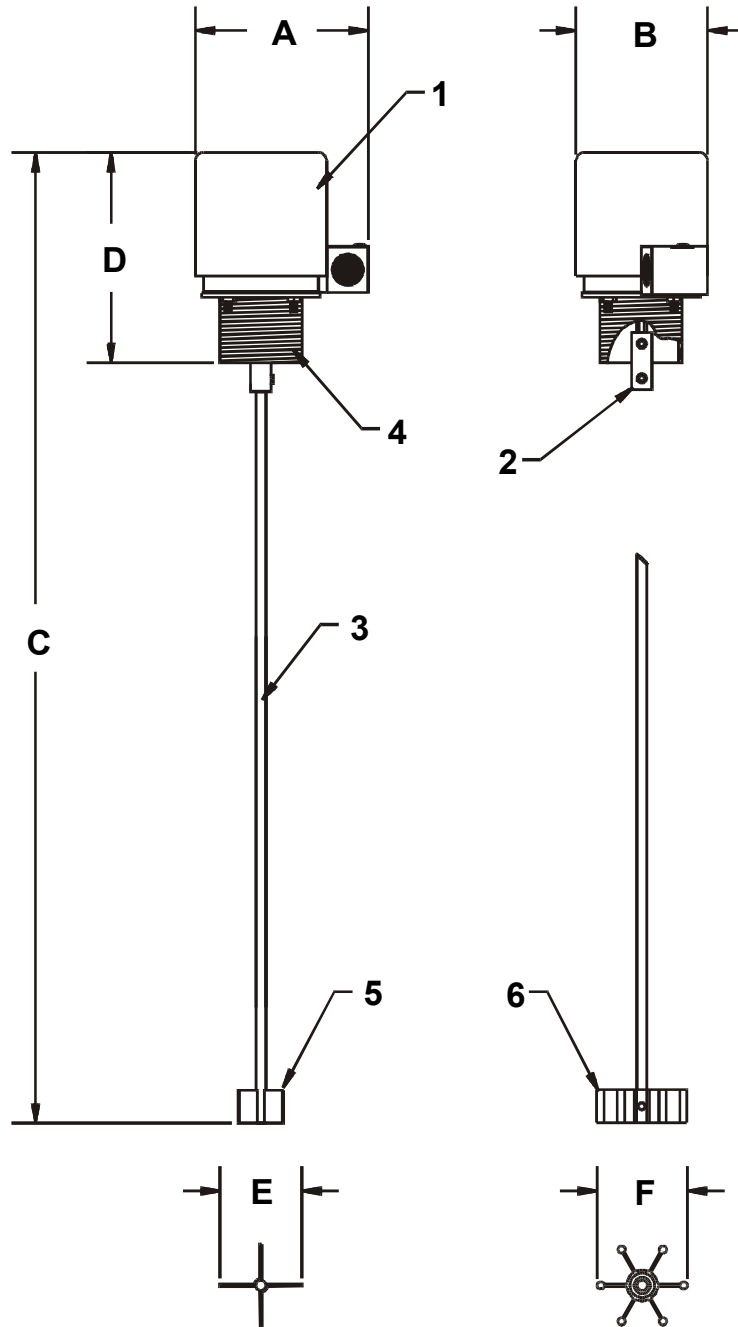

SPECIFICATIONS:

KEY	PART	DESCRIPTION
1	0405-E	MOTOR: 1/20 HP, TEFC
2	0252	COUPLING: 5/16" x 5/16" bored brass coupling with stainless set screws
3	0314/28	SHAFT: 5/16" D x 28" L, 304 stainless steel shaft (for neoprene impeller and SS impeller)
4	0249	MOUNT: 2" NPT thread mount for steel drum mixing, hardware is plated steel
5	0279/28*	[H] SS IMPELLER: 304 stainless steel fabricated to shaft
6	0262	[A] NEOPRENE IMPELLER: Small neoprene impellers with brass/copper hub

* NOTE: Shaft and [H] style stainless steel impellers are prefabricated at the factory (not sold individually)

DIMENSIONS, WEIGHT & CUBE:

KEY	T-M-TE-[]
A	5 3/8"
B	4" diameter
C	34 7/8"
D	6 1/2"
E	1 3/4"
F	1 3/4"
Weight	9 lbs. approx.
Cube	5" X 5" X 36"

MOTOR DATA:	T-M-TE-[]
Voltage	115
Phase / Hertz	1 / 60
Full Load Amps	1.5
Service Factor	1.0
Insulation Class	A

Note: All dimensions are +/- 1/8". All weights are approximate. All dimensions are subject to change without notice.