

COURT THOMAS WINGERT

FLUID PRODUCTS

P.O. Box 6207 • Garden Grove, CA 92846-6207 / 11800 Monarch Street • Garden Grove, CA 92841-2113

Phone (714) 379-5519 • Fax (714) 379-5549 ■ Email: customerservice@jlwingert.com


Northern California Region • Phone (510) 487-5310 ■ Southwest Region • Phone (602) 470-1015

www.jlwingert.com


MANUFACTURING: Mixers, Bypass Feeders, Filter Feeders, Bromine Feeders, Sample Coolers, Sludge Traps, Separators, Separator Systems, Tank Stands, Tank Package Systems, Glycol Feed Systems, Coupon Racks, Control Stations, NEMA Enclosures, Custom Packaged Systems and Specialty Welding

Specification Sheet #141101 Rev. "B" (5/01)

CIRCULAR CHART RECORDERS

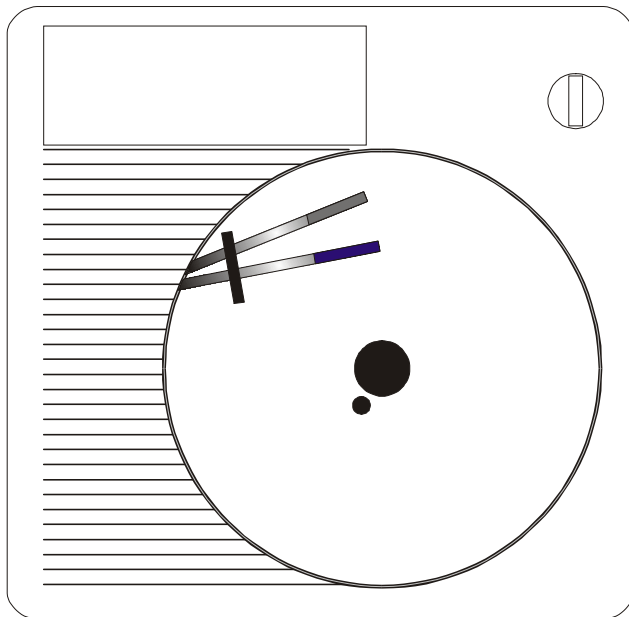

MODEL SHOWN: DR4300GP-2

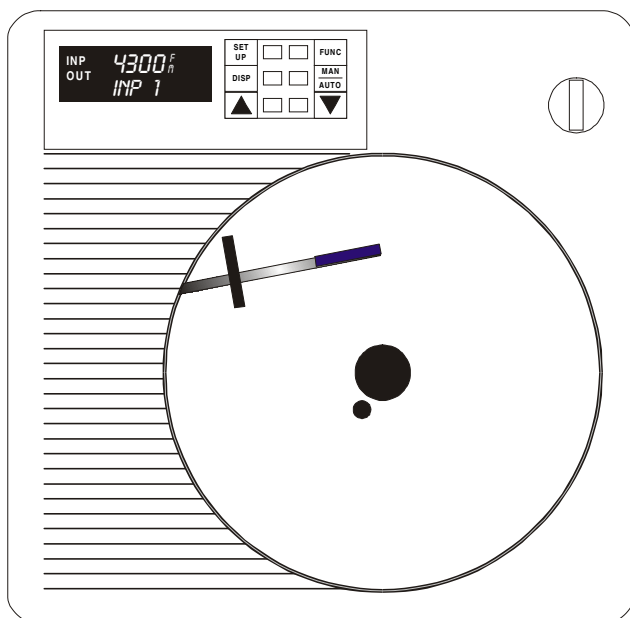

MODEL SHOWN: DR4300EV-1

PART	DESCRIPTION
DR4300GP-1	CIRCULAR CHART RECORDER: Single pen, no display
DR4300GP-2	CIRCULAR CHART RECORDER: Dual pen, no display
DP4300EV-1	CIRCULAR CHART RECORDER: Single pen, digital display, optional 24 volt power supply and MODBUS/ASCII communications
DP4300EV-2	CIRCULAR CHART RECORDER: Dual pen, digital display, optional 24 volt power supply and MODBUS/ASCII communications
OPTION -HD	HOSE DOWN DOOR: With window and lock
OPTION -SP	CONTROL OPTION: Single setpoint, two relays
CP - [*]	CHARTS: Box of 100 (over 150 preprinted charts available)
30735489-007	#1 PEN: Purple, 6 each / box
30735489-002	#2 PEN: Red, 6 each / box

* Specify range at time of order

SPECIFICATIONS

MODEL:	DR 4301 / DR 4302	DR 4311 / DR 4312
CHART SIZE	10" circular chart	10" circular chart
ACCURACY	±0.35% of span	±0.10% of span
INPUTS	2 digital inputs	2 digital inputs / control loops
ACTUATIONS	Accepts thermocouple types J, K, R, S and T; 100 ohm DIN RTD; and the following linear actuations: 0-20 mA, 4-20 mA, 0-20 mV, 0-50 mV, 0-5 VDC and 1-5 VDC	Accepts thermocouple types J, K, T, R, S, B, E, W5W26 and Ni Ni Moly; 100 ohm RTD; and the following linear actuations: 4-20 mA, 0-20 mV, 0-100 mV, 0-200 mV, 0-1 VDC, 0-5 VDC, 1-5 VDC and 0-10 VDC
SPEED/RANGE	User selectable	User selectable
CONTROL	---	Up to 2 optional controllers available
ALARM	Optional high or low manual reset	Up to 2 optional alarms per pen
DIMENSIONS	14" H x 14" W x 6" D	14" H x 14" W x 6" D

Note: All dimensions are subject to change without notice.