
J.L.WINGERT CO.

Specification Sheet

CORROSION COUPON RACKS MODELS PCR-[]-007 AND CCR-[]-007

SS163001.D 05/16

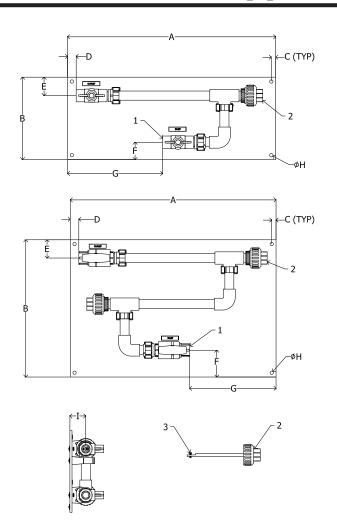

SPECIFICATIONS

PVC and CPVC corrosion coupon racks are constructed from Sch 80 pipe. PVC and CPVC corrosion coupon racks are mounted on a 1/4" thick solid PVC backboard with 25/64" mounting holes located at the corners. All system connections are FNPT.

REPLACEMENT PARTS

KEY	PART	DESCRIPTION			
1	1625-007-PVC	3/4" PVC full port ball valve			
†	1625-007-CPVC	3/4" CPVC full port ball valve			
2	1630-01	3/4" PVC corrosion coupon holder with nylon screw			
2	1630-02	3/4" CPVC corrosion coupon holder with nylon screw			
3	1630-03	8-32 Nylon screw			

PVC uses EPDM Seals / 0-rings. CPVC uses FKM Seals / 0-rings.

TEMPERATURES & PRESSURES*

	NON-SHOCK PRESSURE RATING					
TEMPERATURES (°F / °C)	P\	/C	CPVC			
(1) 3)	PSI	BAR	PSI	BAR		
73° / 23°	150.0	10.4	235.00	16.2		
90° / 32°	112.5	7.7	213.85	14.7		
110° / 43°	75.0	5.2	180.95	12.4		
130° / 54°	45.0	3.1	145.70	10.0		
150° / 66°	N/A	N/A	110.45	7.6		
200° / 93°	N/A	N/A	47.00	3.2		
250° / 121°	N/A	N/A	N/A	N/A		

^{*}Please see appropriate Option Specification Sheet for option variance in pressure and temperature rating.

DIMENSIONS

KEY	MODEL NUMBER						
	_CR-1-007	_CR-2-007	_CR-3-007	_CR-4-007	_CR-5-007	_CR-6-007	
Α	24"	24"	24"	24"	24"	24"	
В	9 1/2"	16"	21"	26"	31"	37"	
С	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	
D	1"	1"	1"	1"	1"	1"	
E	2 1/8"	2 1/8"	2 1/8"	2 1/8"	2 1/8"	2 1/8"	
F	2"	3 1/8"	2 3/4"	2 3/8"	2"	2 5/8"	
G	11"	11"	11"	11"	11"	11"	
Н	25/64"	25/64"	25/64"	25/64"	25/64"	25/64"	
ı	1 7/8"	1 7/8"	1 7/8"	1 7/8"	1 7/8"	1 7/8"	

Note: All dimensions are +/- 1/8". All dimensions are subject to change without notice.

MANUFACTURING: Mixers, Bypass Feeders, Filter Feeders, Bromine Feeders, Sample Coolers, Sludge Traps, Separators, Separator Systems, Tank Stands, Tank Package Systems, Glycol Feed Systems, Coupon Racks, Control Stations, NEMA Enclosures, Custom Packaged Systems and Specialty Welding